


spire KL-A0050

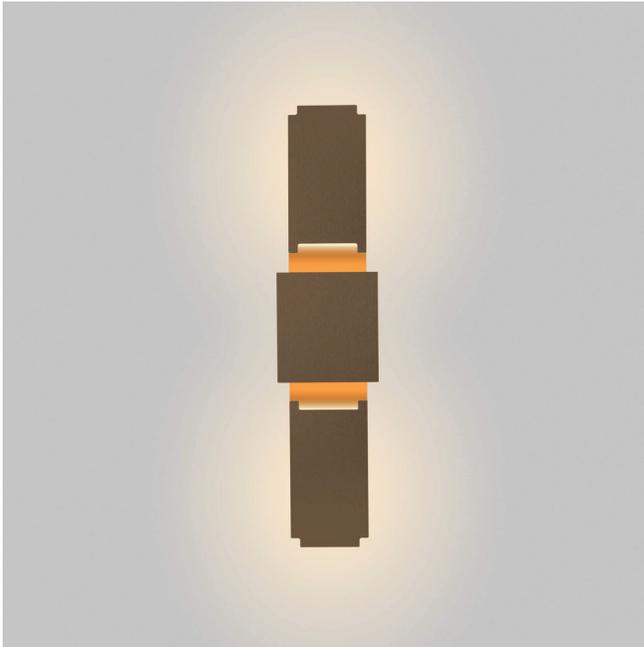

*shown in the open/on position
*shown in bronze

design

The design of the spire wall sconce is a take on traditional candle sconce lights where two outer arms extend upward and downward casting an ambient white light behind, bouncing light out into its environment. The shape of the design is outlined nicely by the light while a user-selectable splash of color accents the centerpiece. Can be mounted vertically or horizontally. Available in three finishes.

light sources

LED - 2700K white.
RGB LED - User-selectable.

housing

CNC machined 6061 aircraft grade aluminum.

facade

CNC machined anodized brushed aluminum with laminated acrylic backing. Moving and stationary. *see website for additional options


installation

Wall plate adapter for installation on a 4" round remodel ceiling box or standard 1-Gang rectangular wall box. Light can be mounted vertically or horizontally.

transition time

7 seconds - closed/OFF to open/ON position.

options

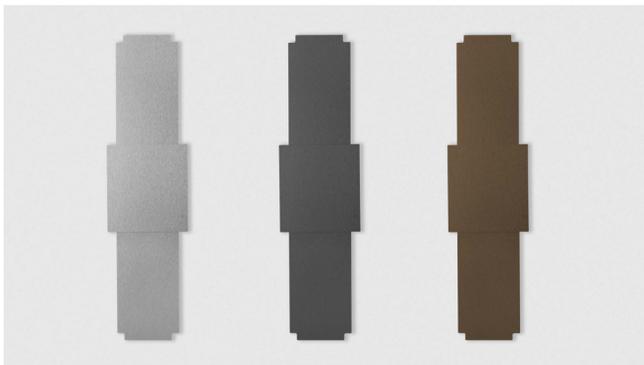

silver

charcoal

bronze

*shown in the closed/off position

series

rive

model

spire - KL-A0050

light sources

2700k white LED's
RGB LED's

voltage

120 volt

housing finish

flat white powder coat


facade finish

anodized brushed aluminum
silver
charcoal
bronze


dimensions

H: closed/open - 21" / 24"
W: closed/open - 5.5"
D: closed/open - 2.75"


size

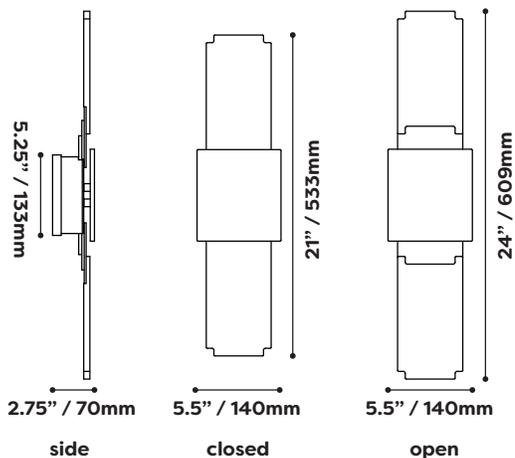

notes:



spire KL-A0050

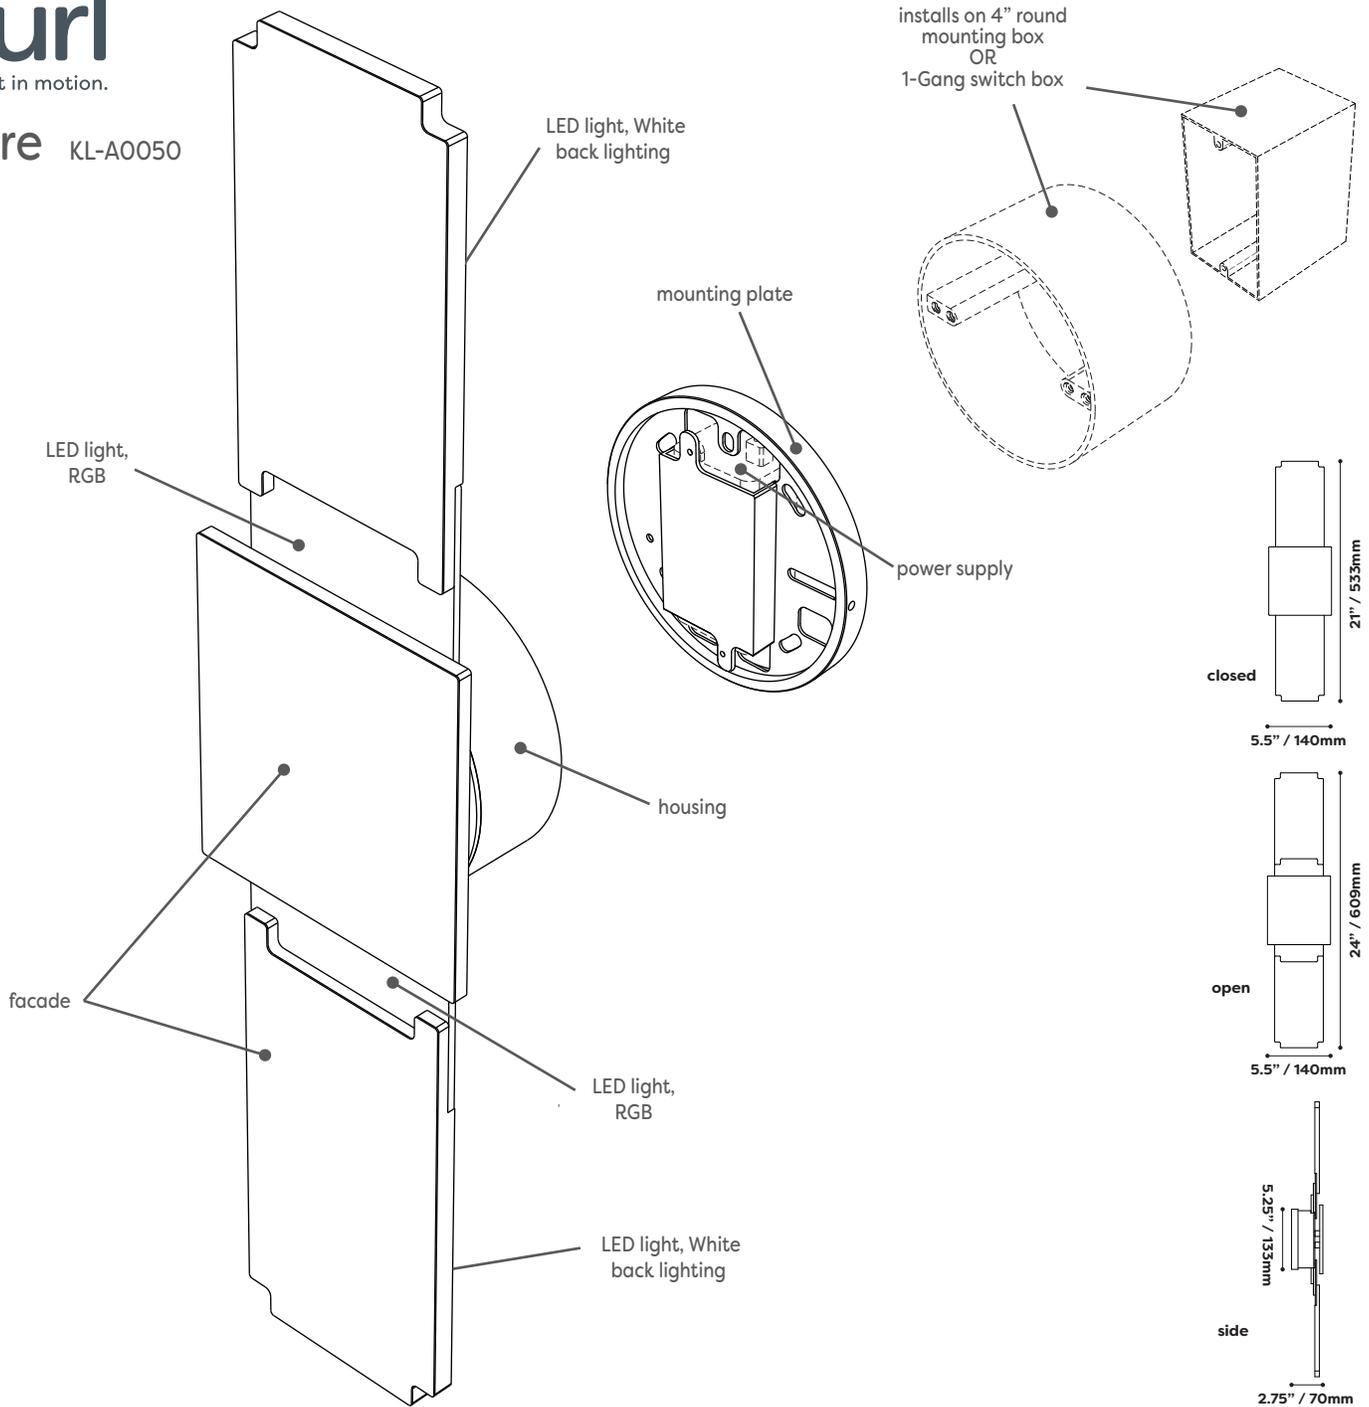

specifications

model	Spire - KL-A0050
size	H: 21" (closed) / 24" (open) W: 5.5" D: 2.75"
finish options	Silver, Charcoal, Bronze.
mounting	Mounting plate installs on 4" round remodel ceiling box or standard 1-Gang box. Vertical or horizontal orientation.
power supply	Input Voltage: 100-240VAC to UL approved DC power supply / Output Voltage: 12VDC - 12 Watts (SELV Class II).
transition time	7 seconds - closed/OFF to open ON.
light sources	White 2700K LED (x12), RGB LED (x18).
mounting plate	CNC machined aluminum. Flat white powder coated finish.
housing	CNC machined aluminum. Flat white powder coated finish.
facade	Anodized brushed aluminum with laminated acrylic backing.

